

Ultra Slim Automatic Upper Arm Blood Pressure Monitor



Specifications

KP- 6520

Measuring Range	Pressure: 20~300 mmHg Pulse Rate: 40~200 pulse/min
Accuracy	Pressure: ± 3 mmHg Pulse Rate: $\pm 5\%$ of reading
Measuring Method	Oscillometric method
Inflation Method	Electrical rolling pump
Deflation Method	Mechanical release valve
Rapid Exhaust	Electrical solenoid valve
Display	OLED
Memory-BPM	2x20
Operation Condition	5 ~ 40 °C (41 ~ 104°F), 15 ~ 90 % RH
Transportation / Storage condition	-20 ~ 55 °C (-4 ~ 131°F) , < 93 % RH
Power Source	Li-Battery 450mAh DC 5V Adaptor with micro USB plug (Optional)
Battery Life	Around 50 measurements
Power Saving	Auto-off after 150 sec non-operation
Size	66x66x30 mm
Weight	Approx. 122 g including batteries
Cuff Range	22~32cm / 22~44cm

Specifications are subject to change for improvement without notice.

K-jump Health Co., Ltd.

No.56,Wu Kung 5th Rd.,New Taipei Industrial Park,

New Taipei City 24890,Taiwan

Tel: 886-2-22991378 Fax:886-2-22991386

E-mail: service@kjump.com

http://www.kjump.com




CE 0197

Characteristic:



Optional:

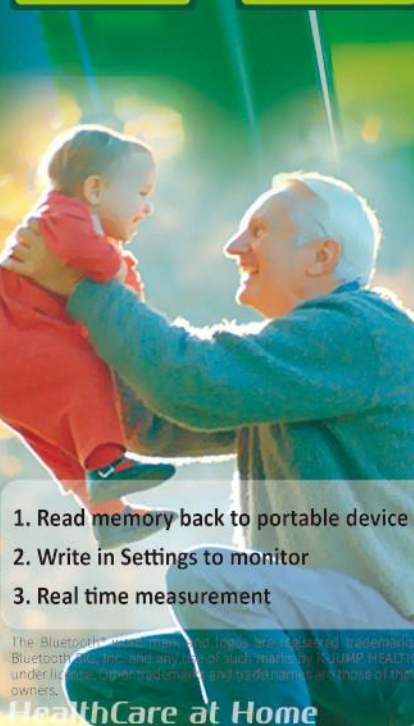

1. Read memory back to portable device
2. Write in Settings to monitor
3. Real time measurement

The Bluetooth word mark and logo are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by K-JUMP HEALTH CO., LTD. under license under trademark and trademark law of their respective owners.

HealthCare at Home
We Care for Your Health