

K-jump®

Automatic Upper Arm Blood Pressure Monitor



Specifications

KP-6760

Measuring Range	Pressure: 20~300 mmHg Pulse Rate: 40~200 pulse/min
Accuracy	Pressure: ± 3 mmHg Pulse Rate: ± 5 % of reading
Measuring Method	Oscillometric method
Inflation Method	Electrical rolling pump
Deflation Method	Mechanical release valve
Rapid Exhaust	Electrical solenoid valve
Display	Digital liquid crystal display
Memory	7, 42, 85, 99 sets
Operation Condition	5 ~ 40°C (41 ~ 104°F), 15 ~ 90 % RH
Storage Condition	-20 ~ 55°C (-4 ~ 131°F), < 93 % RH
Power Source	AA alkaline battery x 4 or AC adapt or with DC 6V/0.8A output(Optional)
Battery Life	Around 250 measurements with alkaline batteries
Power Saving	Auto-off after 150 sec non-operation
Size	140 x 80 x 47 mm
Weight	Approx. 330 g including batteries
Cuff Range	22 ~ 32 cm or 20 ~ 35 cm or 32 ~ 42 cm

Specifications are subject to change for improvement without notice.

Accessories:

· AC/DC adapter (optional)

K-jump Health Co., Ltd.

No.56, Wu Kung 5th Rd., New Taipei Industrial Park,
New Taipei City 24890, Taiwan

Tel: 886-2-22991378 Fax: 886-2-22991386

E-mail: service@kjump.com

<http://www.kjump.com>




CE 0197

Characteristic:



Optional:

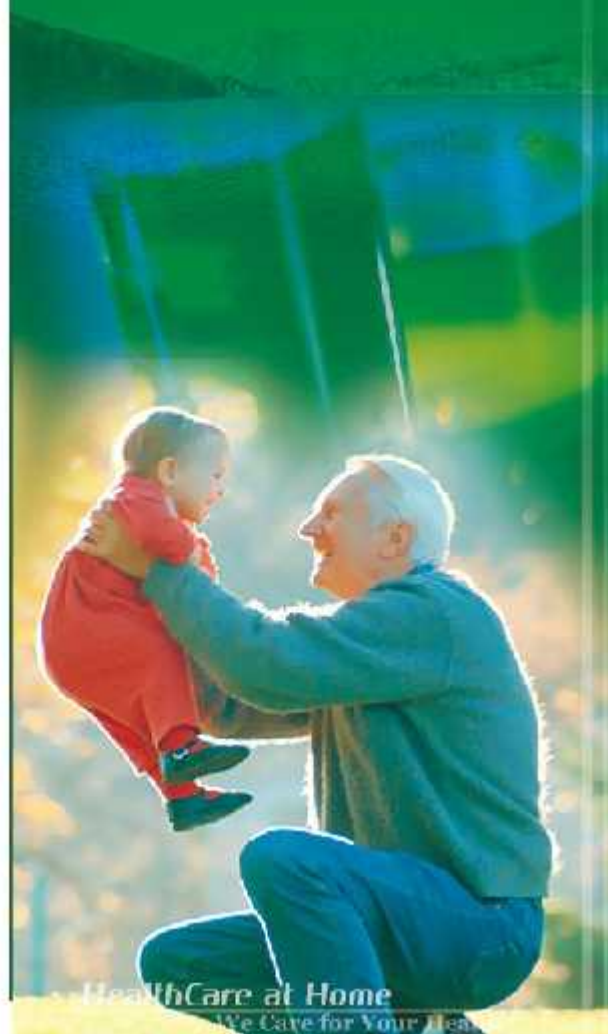

HealthCare at Home

We Care for Your Health