

K-jump®

Automatic Upper Arm Blood Pressure Monitor



Specifications

Model	KP-6720	KP-6821	KP-6823	KP-6825
Measuring Range	20 ~ 300 mmHg 40 ~ 200 pulse/minute			
Resolution	1 mmHg			
Accuracy	±3 mmHg or 2% (pressure) ±5% of readings (pulse rate)			
Measuring Method	Oscillometric method			
Operation Key	Two Keys: Power/Start, Memory			
Display	Liquid Crystal Display			
Inflation	Micro rolling pump			
Exhaust	Electrical Solenoid Valve			
Memory	42-set, or 85-set			
Time	Displaying date, time and year			
Operation Condition	Temperature: 10°C ~ 40°C (50°F ~ 104°F) Relative Humidity: less than 85%			
Storage Condition	Temperature: -10°C ~ +50°C (+14°F ~ +122°F) Relative Humidity: less than 85%			
Power Source	6Vdc; "AA" type battery x 4 or AC/DC power input			
Battery Life	Around 250 measurements (alkaline batteries)			
Low Battery Indication	Replace the batteries if the low battery indicator appears			
Auto Off	Automatically after 150 seconds without operation			
Size	156 x 167 x 54 mm	140 x 80 x 47 mm	140 x 80 x 46 mm	140 x 80 x 47 mm
Weight	600g w/ batt.	330g w/ batt.	330g w/ batt.	330g w/ batt.
Standard	Complies with EN 1060-1, -3 and ANSI/AAMI SP10:2002			

Specifications are subject to change for improvement without notice.

Accessories:

- AC/DC adapter (optional)

K-jump Health Co., Ltd.

No.56, Wu Kung 5th Rd., New Taipei Industrial Park,
New Taipei City 24890, Taiwan


Tel: 886-2-22991378 Fax: 886-2-22991386

E-mail: service@kjump.com

http://www.kjump.com



CE 0197

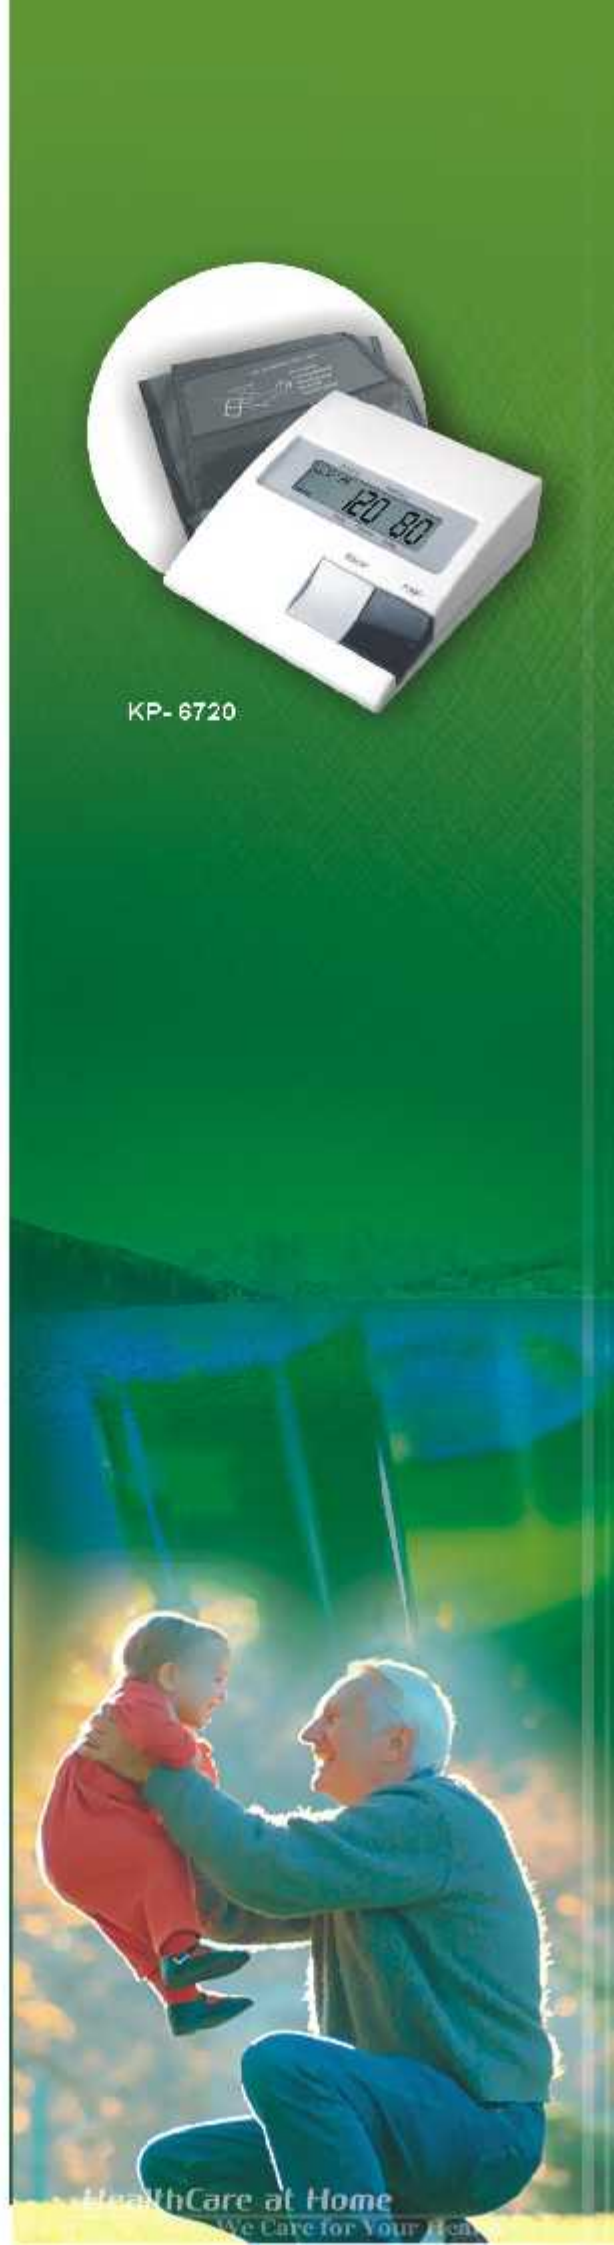

HealthCare at Home

We Care for Your Health