

K-jump®

Automatic Upper Arm Blood Pressure Monitor



KP- 6845

Specifications

Model	KP- 6845
Measuring Range	20 ~ 300 mmHg 40 ~ 200 pulse/minute
Resolution	1 mmHg
Accuracy	±3 mmHg or 2% (pressure) ±5% of readings (pulse rate)
Measuring Method	Oscillometric method
Operation Key	Two Keys: I/O, Memory
Display	Liquid Crystal Display
Inflation	Micro rolling pump
Exhaust	Electrical Solenoid Valve
Memory	42-set, or 85-set
Time	Displaying date, time and year
Operation Condition	Temperature: 10°C ~ 40°C (50°F ~ 104°F) Relative Humidity: less than 85%
Storage Condition	Temperature: -10°C ~ +50°C (+14°F ~ +122°F) Relative Humidity: less than 85%
Power Source	6Vdc; "AA" type battery x4 or DC power input
Battery Life	Around 250 measurements(alkaline batteries)
Low Battery Indication	Replace the batteries if the low battery indicator appears
Auto Off	Automatically after 150 seconds without operation
Size	83 x 122 x39mm
Weight	Approx. 300g (with battery)
Standard	Complies with EN 1060-1, -3 and ANSI/AAMI SP10:2002

Specifications are subject to change for improvement without notice.

Accessories:

- AC/DC adapter (optional)

K-jump Health Co., Ltd.

No.56,Wu Kung 5th Rd.,New Taipei Industrial Park,
New Taipei City 24890,Taiwan


Tel: 886-2-22991378 Fax: 886-2-22991386

E-mail: service@kjump.com

<http://www.kjump.com>



CE 0197

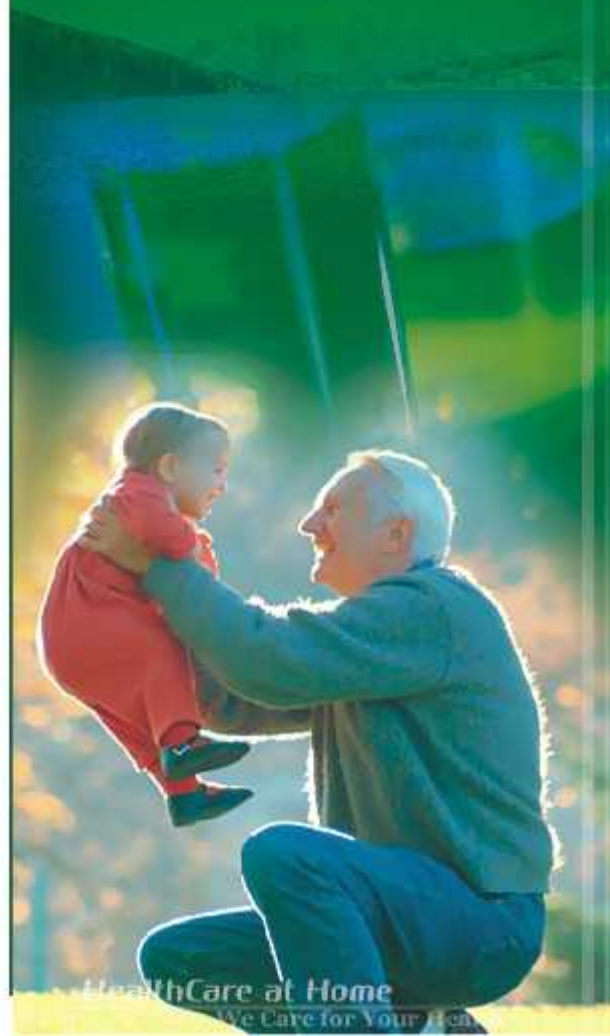

HealthCare at Home

We Care for Your Health